



Cambridge IGCSE™

CANDIDATE
NAME

CENTRE
NUMBER

| | | | | |
|--|--|--|--|--|
| | | | | |
|--|--|--|--|--|

CANDIDATE
NUMBER

| | | | |
|--|--|--|--|
| | | | |
|--|--|--|--|

* 0 1 2 3 4 5 6 7 8 9 *

COMPUTER SCIENCE

0478/02

Paper 2 Algorithms, Programming and Logic

For examination from 2023

SPECIMEN PAPER

1 hour 45 minutes

You must answer on the question paper.

No additional materials are needed.

INSTRUCTIONS

- Answer **all** questions.
- Use a black or dark blue pen. You may use an HB pencil for any diagrams or graphs.
- Write your name, centre number and candidate number in the boxes at the top of the page.
- Write your answer to each question in the space provided.
- Do **not** use an erasable pen or correction fluid.
- Do **not** write on any bar codes.
- Calculators must **not** be used in this paper.

INFORMATION

- The total mark for this paper is 75.
- The number of marks for each question or part question is shown in brackets [].
- No marks will be awarded for using brand names of software packages or hardware.

This document has **16** pages. Any blank pages are indicated.

3

2 Describe the purpose of validation and verification checks during data entry.

Include an example for each.

Validation check

.....

.....

.....

Verification check

.....

.....

.....

[4]

4

3 Tick (✓) **one** box to show the named section of a program that performs a specific task.

A file

B function

C parameter

D process

[1]

4 A satellite navigation system is an example of a computer system that is made up of sub-systems.

Part of a satellite navigation system:

- allows the user to enter details for a new destination or select a previously saved destination
- displays directions in the form of a visual map or as a list.

Draw a structure diagram for this part of the satellite navigation system.

[4]

- 5 An algorithm has been written in pseudocode to input some numbers. It only outputs any numbers that are greater than or equal to 100. The number 999 is not output and stops the algorithm.

```

INPUT Number
WHILE Numbers <> 999 DO
  IF Number > 100
    THEN
      OUTPUT Number
    ENDIF
  ENDWHILE
OUTPUT Number

```

- (a) Identify the **four** errors in the pseudocode and suggest corrections.

Error 1

Correction

.....

Error 2

Correction

.....

Error 3

Correction

.....

Error 4

Correction

.....

[4]

- (b) Write a pseudocode statement to change the corrected algorithm to output all numbers between 100 and 200 inclusive.

You do **not** need to rewrite the whole algorithm

.....

.....

.....

..... [2]

6


6 Consider this logic expression.

$$X = (A \text{ AND } B) \text{ OR } (B \text{ AND NOT } C)$$

(a) Draw a logic circuit for this logic expression.

Each logic gate must have a maximum of **two** inputs.

Do **not** simplify this logic expression.

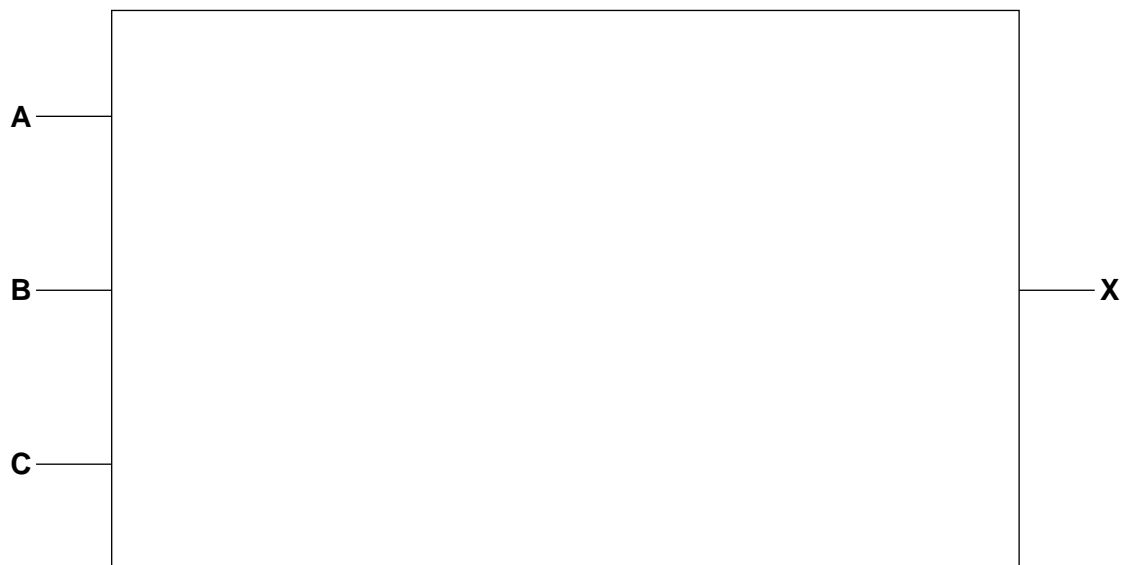

[4]


(b) Complete the truth table from the given logic expression.

| A | B | C | Working space | X |
|---|---|---|---------------|---|
| 0 | 0 | 0 | | |
| 0 | 0 | 1 | | |
| 0 | 1 | 0 | | |
| 0 | 1 | 1 | | |
| 1 | 0 | 0 | | |
| 1 | 0 | 1 | | |
| 1 | 1 | 0 | | |
| 1 | 1 | 1 | | |

[4]

BLANK PAGE

7 This flowchart represents an algorithm.

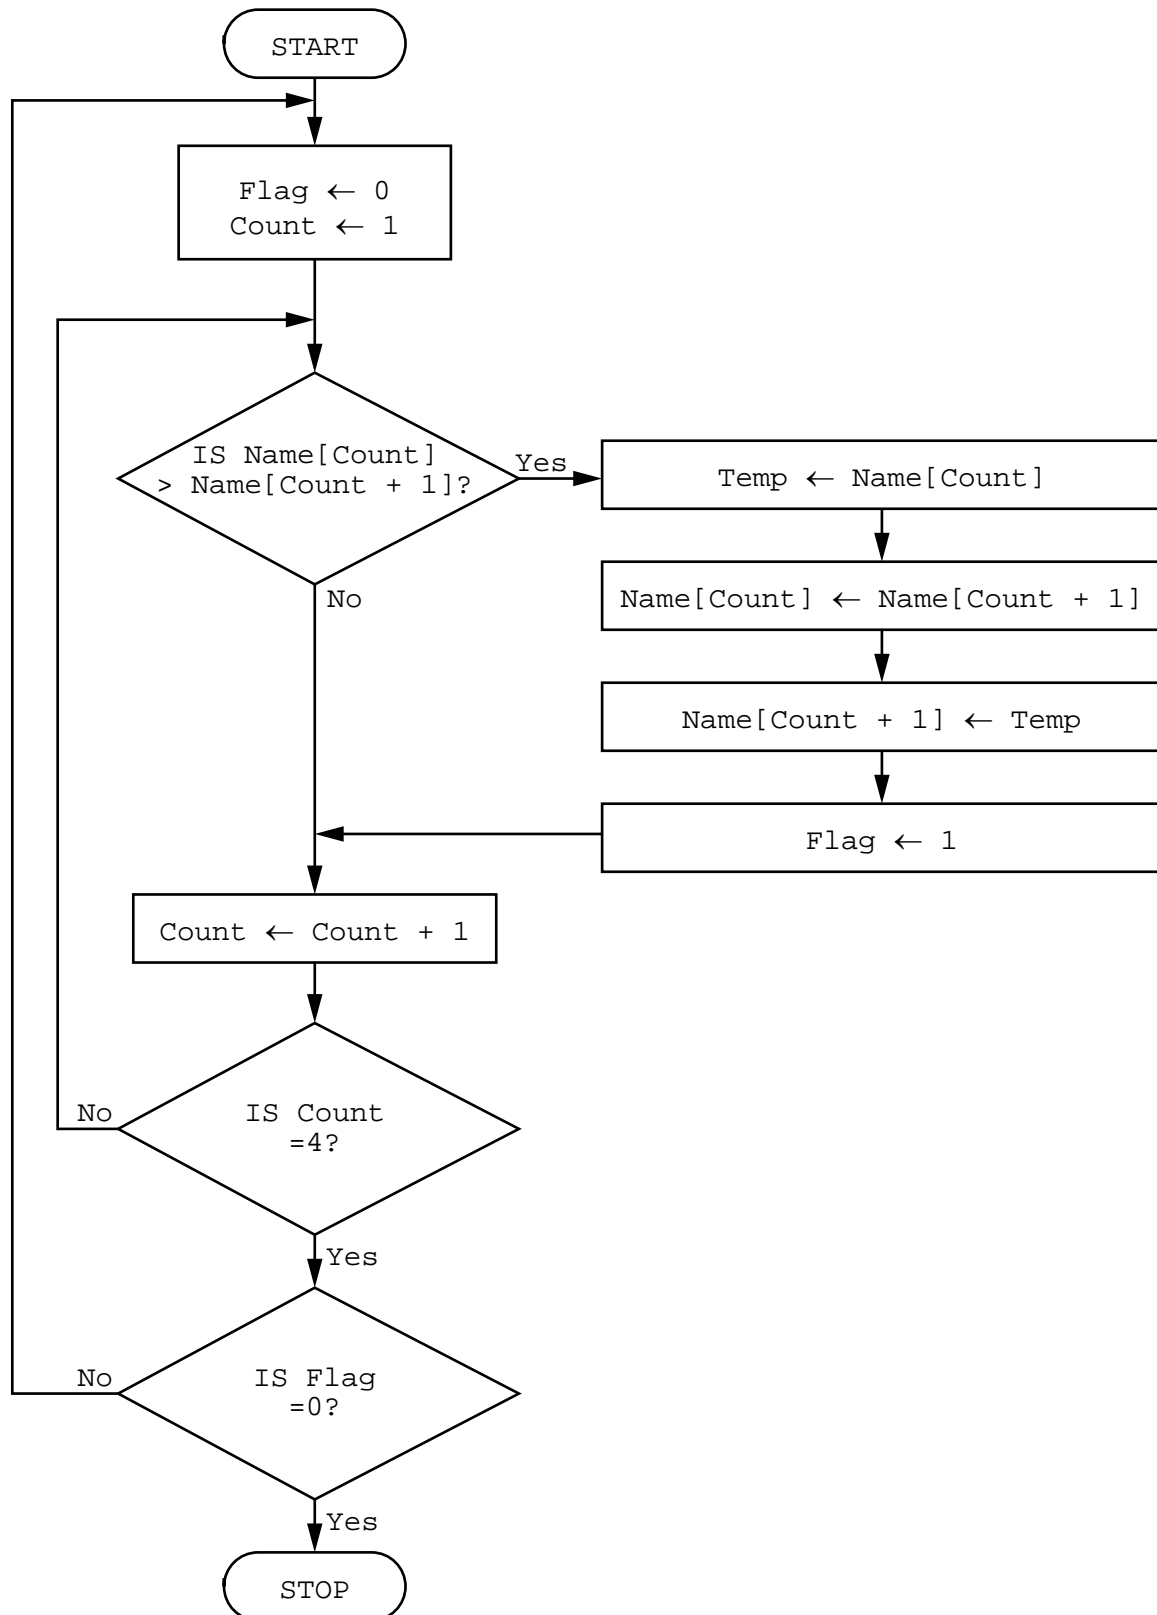

10

8 A programmer has written an algorithm to check that prices are less than \$10.00

These values are used as test data:

10.00 9.99 ten

State why each value was chosen as test data.

10.00

9.99

ten

[3]

9 Explain why a program might need to store data in a file.

.....
.....
.....
.....
.....
.....
..... [3]

10 A function is declared using pseudocode.

```
FUNCTION ConvertToCm(Inches: REAL) RETURNS REAL
  RETURN Inches * 2.4
ENDFUNCTION
```

Tick (✓) **one** box which accurately describes the use of the variable Inches

- A answer
- B call
- C parameter
- D response

[1]

11 A database table, 2018MOV, is used to keep a record of movie details.

| CatNo | Title | Genre1 | Genre2 | Blu-ray | DVD | Streaming |
|-------|-------------------------------|-----------|----------|---------|-----|-----------|
| 18m01 | Power Rangers | Adventure | Fantasy | Yes | No | Yes |
| 18m02 | Baywatch | Comedy | Drama | Yes | No | Yes |
| 18m03 | Table 19 | Comedy | Drama | Yes | Yes | No |
| 18m04 | Wonder Woman | Action | Fantasy | Yes | No | Yes |
| 18m05 | Justice League | Action | Fantasy | Yes | Yes | Yes |
| 18m06 | Twilight | Thriller | Action | Yes | Yes | No |
| 18m07 | Ant Man | Action | Fantasy | No | Yes | No |
| 18m08 | Venice Beach | Action | History | No | Yes | No |
| 18m12 | Fast Five | Action | Thriller | No | Yes | No |
| 18m15 | King Kong | Adventure | Fantasy | No | Yes | No |
| 18m16 | Transformers: The Last Knight | Action | Sci-Fi | Yes | Yes | Yes |
| 18m17 | The Dark Tower | Fantasy | Sci-Fi | Yes | Yes | No |
| 18m19 | Beauty and the Beast | Fantasy | Romance | Yes | Yes | Yes |
| 18m21 | The Mummy | Action | Fantasy | No | No | Yes |
| 18m22 | Star Wars: Episode VIII | Sci-Fi | Action | Yes | No | Yes |
| 18m23 | Guardians of the Galaxy | Action | Sci-Fi | Yes | Yes | Yes |
| 18m26 | Thor | Action | Sci-Fi | No | Yes | Yes |
| 18m27 | Twilight | Fantasy | Sci-Fi | No | No | Yes |
| 18m30 | Beneath | Action | Fantasy | Yes | No | No |
| 18m31 | Despicable Me | Animation | Action | Yes | Yes | No |

(a) State the number of records in the database table.

..... [1]

(b) (i) Give the name of the field that would be used for the primary key.

..... [1]

(ii) State the reason for choosing this field for the primary key.

.....

..... [1]

- (c) Complete the table to identify the most appropriate data type for each field based on the data shown in the database table, 2018MOV.

| Field | Data type |
|-----------|-----------|
| CatNo | |
| Title | |
| Genrel | |
| Streaming | |

[2]

- (d) Complete the structured query language (SQL) to return the category number and title for all Comedy movies.

```
SELECT CatNo, Title
```

```
..... 2018MOV
```

```
WHERE Genrel = .....
```

[2]

