

Mark Scheme (Results)

Summer 2013

GCE Mechanics 3 (6679/01R)

Edexcel and BTEC Qualifications

Edexcel and BTEC qualifications come from Pearson, the world's leading learning company. We provide a wide range of qualifications including academic, vocational, occupational and specific programmes for employers. For further information, please visit our website at www.edexcel.com.

Our website subject pages hold useful resources, support material and live feeds from our subject advisors giving you access to a portal of information. If you have any subject specific questions about this specification that require the help of a subject specialist, you may find our Ask The Expert email service helpful.

www.edexcel.com/contactus

Pearson: helping people progress, everywhere

Our aim is to help everyone progress in their lives through education. We believe in every kind of learning, for all kinds of people, wherever they are in the world. We've been involved in education for over 150 years, and by working across 70 countries, in 100 languages, we have built an international reputation for our commitment to high standards and raising achievement through innovation in education. Find out more about how we can help you and your students at: www.pearson.com/uk

Summer 2013

Publications Code UA036430

All the material in this publication is copyright

© Pearson Education Ltd 2013

General Marking Guidance

- All candidates must receive the same treatment. Examiners must mark the first candidate in exactly the same way as they mark the last.
- Mark schemes should be applied positively. Candidates must be rewarded for what they have shown they can do rather than penalised for omissions.
- Examiners should mark according to the mark scheme not according to their perception of where the grade boundaries may lie.
- There is no ceiling on achievement. All marks on the mark scheme should be used appropriately.
- All the marks on the mark scheme are designed to be awarded. Examiners should always award full marks if deserved, i.e. if the answer matches the mark scheme. Examiners should also be prepared to award zero marks if the candidate's response is not worthy of credit according to the mark scheme.
- Where some judgement is required, mark schemes will provide the principles by which marks will be awarded and exemplification may be limited.
- Crossed out work should be marked UNLESS the candidate has replaced it with an alternative response.

EDEXCEL GCE MATHEMATICS

General Instructions for Marking

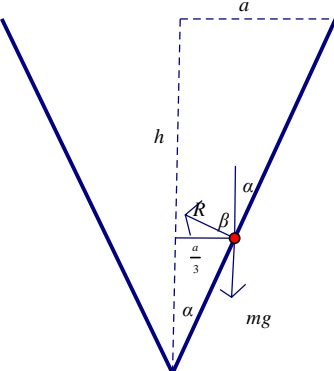
1. The total number of marks for the paper is 75.
2. The Edexcel Mathematics mark schemes use the following types of marks:
 - **M** marks: method marks are awarded for 'knowing a method and attempting to apply it', unless otherwise indicated.
 - **A** marks: accuracy marks can only be awarded if the relevant method (M) marks have been earned.
 - **B** marks are unconditional accuracy marks (independent of M marks)
 - Marks should not be subdivided.
3. Abbreviations

These are some of the traditional marking abbreviations that will appear in the mark schemes:

- bod – benefit of doubt
 - ft – follow through
 - the symbol \surd will be used for correct ft
 - cao – correct answer only
 - cso - correct solution only. There must be no errors in this part of the question to obtain this mark
 - isw – ignore subsequent working
 - awrt – answers which round to
 - SC: special case
 - oe – or equivalent (and appropriate)
 - dep – dependent
 - indep – independent
 - dp decimal places
 - sf significant figures
 - * The answer is printed on the paper
 - \square The second mark is dependent on gaining the first mark
4. All A marks are 'correct answer only' (cao.), unless shown, for example, as A1 ft to indicate that previous wrong working is to be followed through. After a misread however, the subsequent A marks affected are treated as A ft, but manifestly absurd answers should never be awarded A marks.
 5. For misreading which does not alter the character of a question or materially simplify it, deduct two from any A or B marks gained, in that part of the question affected.
 6. If a candidate makes more than one attempt at any question:
 - If all but one attempt is crossed out, mark the attempt which is NOT crossed out.
 - If either all attempts are crossed out or none are crossed out, mark all the attempts and score the highest single attempt.
 7. Ignore wrong working or incorrect statements following a correct answer.
 8. In some instances, the mark distributions (e.g. M1, B1 and A1) printed on the candidate's response may differ from the final mark scheme

General Rules for Marking Mechanics

- Usual rules for M marks: correct no. of terms; dim correct; all terms that need resolving (i.e. multiplied by cos or sin) are resolved.
- Omission or extra g in a resolution is accuracy error not method error.
- Omission of mass from a resolution is method error.
- Omission of a length from a moments equation is a method error.
- Omission of units or incorrect units is not (usually) counted as an accuracy error.
- DM indicates a dependent method mark i.e. one that can only be awarded if a previous specified method mark has been awarded.
- Any numerical answer which comes from use of $g = 9.8$ should be given to 2 or 3 SF.
- Use of $g = 9.81$ should be penalised once per (complete) question.
- N.B. Over-accuracy or under-accuracy of correct answers should only be penalised *ONCE* per complete question.
- In all cases, if the candidate clearly labels their working under a particular part of a question i.e. (a) or (b) or (c),.....then that working can only score marks for that part of the question.
- Accept column vectors in all cases.
- Misreads – if a misread does not alter the character of a question or materially simplify it, deduct two from any A or B marks gained, bearing in mind that after a misread, the subsequent A marks affected are treated as A ft.

Question Number	Scheme	Marks
1.	 <p>Vertical: $R \cos \beta = mg$</p> <p>Horizontal: $R \sin \beta = \frac{mv^2}{r} = \frac{3mv^2}{a}$</p> <p>Divide: $\tan \beta = \frac{3mv^2}{amg}$</p> <p>$\tan \beta = \frac{h}{a}$</p> <p>$\frac{3mv^2}{amg} = \frac{h}{a}, \frac{3v^2}{g} = h, v = \sqrt{\frac{hg}{3}}$</p> <p style="text-align: right;">*AG*</p>	<p>M1A1</p> <p>M1A1</p> <p>M1dep</p> <p>B1</p> <p>A1</p> <p style="text-align: right;">(7) [7]</p>

Question Number	Scheme	Marks
2.	$F = 1 + 3t^{\frac{1}{2}} = m \frac{dv}{dt} = 4 \frac{dv}{dt}$ $4v = \int 1 + 3t^{\frac{1}{2}} dt = t + 2t^{\frac{3}{2}} (+C)$ $v = \frac{1}{4}(t + 2t^{1.5}) + 2$ $t = 4, v = \frac{1}{4}(4 + 16) + 2 = 7 \text{ (m s}^{-1}\text{)}$ <p>Work done = gain in KE = $\frac{1}{2}mv^2 - \frac{1}{2}mu^2$ their v</p> $= \frac{1}{2} \times 4 \times 7^2 - \frac{1}{2} \times 4 \times 2^2 = 90 \text{ (J)}$	B1 M1A1 A1 A1ft M1 A1 (7) [7]



Question Number	Scheme	Marks
<p>3. (a)</p>	<p>Weight + thrust = mass x accn. $0.5 \times g + \frac{20 \times 1}{2} = 0.5a$ $a = g + 20 = 29.8 \approx 30 \text{ (m s}^{-2}\text{)}$</p>	<p>M1 B1(thrust) A1ft A1 (4)</p>
<p>(b)</p>	<p>Change in GPE = $mg(x+1)$ EPE at B = $\frac{20 \times 1^2}{2 \times 2}$ or EPE at C = $\frac{20 \times x^2}{2 \times 2}$ Conservation of energy: $\frac{20 \times 1^2}{2 \times 2} + mgh = \frac{20 \times x^2}{2 \times 2}$ $h = x + 1$ $5 + 0.5g(x + 1) = 5x^2$ $5x^2 - 0.5gx - (5 + .5g) = 0$ $x = \frac{0.5g + \sqrt{(0.5g)^2 + 20(5 + 0.5g)}}{10} = 1.98$ Distance BC = $1 + 1.98 = 2.98 \text{ (m)}$</p>	<p>B1 B1 M1A1 M1dep A1 (6) [10]</p>

Question Number	Scheme	Marks
<p>4. (a)</p>	$v = \frac{4}{(x+2)} = \frac{dx}{dt}$ $\frac{dt}{dx} = \frac{x+2}{4}; \int_{t=0}^{t=2} 1 dt = \frac{1}{4} \int_{x=0}^{x=X} (x+2) dx, [t]_0^2 = \frac{1}{4} \left[\frac{x^2}{2} + 2x \right]_0^X$ $2 = \frac{X^2}{8} + \frac{X}{2},$ $0 = X^2 + 4X - 16, \quad X = \frac{-4 + \sqrt{80}}{2} = 2.47 \text{ (m)}$	<p>B1</p> <p>M1,A1</p> <p>M1depA1</p> <p>(5)</p>
<p>(b)</p>	$a \left(= \frac{dv}{dt} \right) = v \frac{dv}{dx}$ $= \frac{4}{(x+2)} \times \frac{-4}{(x+2)^2}$ $= \frac{-16}{(2.47+2)^3} = -0.1788...$ <p>0.18 (m s⁻²) towards O.</p> <p style="text-align: right;">their X</p>	<p>B1</p> <p>M1A1</p> <p>M1dep</p> <p>A1</p> <p>(5)</p> <p>[10]</p>

Question Number	Scheme	Marks
<p>5. (a)</p>	<p>Use of Energy at A = energy at B</p> $\frac{1}{2}mu^2 = \frac{1}{2}mv^2 + mgh, \quad \frac{1}{2}mgr = \frac{1}{2}mv^2 + mg \times r(1 - \cos \alpha)$ $= \frac{1}{2}mv^2 + mg \times r \times \frac{1}{5}$ $v^2 = gr - \frac{2gr}{5} = \frac{3gr}{5}$ $v = \sqrt{\frac{3gr}{5}} \quad \text{*AG*}$	<p>M1 A1A1</p> <p>A1</p> <p>(4)</p>
<p>(b) v1</p>	<p>Horizontal component of speed at B and at C = their $v \cos \theta$ Vertical component of speed at B = their $v \sin \theta$</p> <p>Conservation of energy gives speed at C = $\sqrt{\frac{2g}{5}}$</p> <p>Vertical component of speed at C = $\sqrt{\frac{2g}{5} - \frac{16 \times 6g}{25^2}} \approx 1.5539..$</p> <p>$v = u + at \Rightarrow \quad t = \frac{1.5539... + 0.92017...}{g} \approx 0.252.. \text{seconds}$</p> <p>Horizontal distance = $\frac{3}{5} \times 0.4 + 1.22689.. \times 0.252... = 0.55 \text{ (m)}$</p>	<p>M1 M1</p> <p>M1A1</p> <p>M1A1</p> <p>M1A1</p> <p>(8)</p>
<p>(b) v2</p>	<p>Horizontal component of speed at B and at C = their $v \cos \theta$ Vertical component of speed at B = their $v \sin \theta$</p> $s = ut + \frac{1}{2}at^2 : -\frac{1}{5} \times 0.4 = -\frac{2}{25} = \sqrt{\frac{6g}{25}} \times \frac{3}{5}t - \frac{1}{2}gt^2$ $4.9t^2 - .92017..t - 0.08 = 0$ $t = \frac{0.920 + \sqrt{0.920^2 + 0.32 \times 4.9}}{9.8} = 0.252.....$ <p>Horizontal distance = $\frac{3}{5} \times 0.4 + 1.22689.. \times 0.252... = 0.55 \text{ (m)}$</p>	<p>M1 M1 M1A1</p> <p>M1A1</p> <p>M1A1</p> <p>(8)</p>

Question Number	Scheme	Marks
(b) v3	Horizontal component of speed at B and at C = their $v \cos \theta$	M1
	Vertical component of speed at B = their $v \sin \theta$	M1
	$s = ut + \frac{1}{2}at^2 : -\frac{1}{5} \times 0.4 = -\frac{2}{25} = \sqrt{\frac{6g}{25}} \times \frac{3}{5}t - \frac{1}{2}gt^2$	M1A1
	$4.9t^2 - .92017t - 0.08 = 0$	
	Horizontal distance from B = $1.22689... \times t = x$	
	Form quadratic in x by substituting for t above	M1
$3.255x^2 - 0.75x - 0.08 = 0$		
$x = \frac{0.75 + \sqrt{0.75^2 + 4 \times 3.255 \times 0.08}}{2 \times 3.255} = 0.3097...$	M1A1	
Horizontal distance = $\frac{3}{5} \times 0.4 + 0.3097... = 0.55$ (m)	A1	
		(8) [12]

Question Number	Scheme	Marks								
<p>6 (a)</p> <p>v1</p>	<p>Mass of quadrant = $\rho \frac{\pi a^2}{4}$</p> $\int_0^a \rho x \sqrt{a^2 - x^2} dx = \rho \left[-\frac{1}{3} (a^2 - x^2)^{\frac{3}{2}} \right]_0^a$ $= \rho \left[0 + \frac{1}{3} a^3 \right]$ $\rho \frac{\pi a^2}{4} \bar{x} = \rho \frac{a^3}{3}$ $\bar{x} = \frac{4a}{3\pi}, \quad \bar{y} = \frac{4a}{3\pi} \text{ by symmetry *AG*}$	<p>B1</p> <p>M1A1 A1</p> <p>A1</p> <p>M1</p> <p>A1,A1</p> <p style="text-align: right;">(7)</p>								
<p>(b)</p>	<table border="1" data-bbox="320 857 1075 1032"> <tr> <td>Area</td> <td>$2a^2$</td> <td>$\frac{\pi a^2}{4}$</td> <td>$-\frac{\pi a^2}{4}$</td> </tr> <tr> <td>Distance to AE</td> <td>$\frac{a}{2}$</td> <td>$a + \frac{4a}{3\pi}$</td> <td>$a - \frac{4a}{3\pi}$</td> </tr> </table> <p>Moments about AE: $2a^2 \bar{x} = 2a^2 \frac{a}{2} + \frac{\pi a^2}{4} (a + \frac{4a}{3\pi}) - \frac{\pi a^2}{4} (a - \frac{4a}{3\pi})$</p> $= a^3 + \frac{2a^3}{3} = \frac{5a^3}{3}$ $\bar{x} = \frac{5a^3}{3} \times \frac{1}{2a^2} = \frac{5a}{6}$	Area	$2a^2$	$\frac{\pi a^2}{4}$	$-\frac{\pi a^2}{4}$	Distance to AE	$\frac{a}{2}$	$a + \frac{4a}{3\pi}$	$a - \frac{4a}{3\pi}$	<p>B1</p> <p>M1A2</p> <p>A1</p> <p style="text-align: right;">(5)</p>
Area	$2a^2$	$\frac{\pi a^2}{4}$	$-\frac{\pi a^2}{4}$							
Distance to AE	$\frac{a}{2}$	$a + \frac{4a}{3\pi}$	$a - \frac{4a}{3\pi}$							
<p>(c)</p>	<p>Taking moments about E: $2aX = \frac{5a}{6}W$</p> $X = \frac{5}{12}W$	<p>their \bar{x}</p> <p>M1A1ft</p> <p>A1</p> <p style="text-align: right;">(3)</p>								
<p>6 (a)</p> <p>v2</p>	<p>Mass of quadrant = $\rho \frac{\pi a^2}{4}$</p> $\int_0^{\frac{\pi}{2}} \rho \cdot \frac{1}{2} a^2 \cdot \frac{2}{3} a \cos \theta d\theta = \left[\frac{a^3}{3} \sin \theta \right]_0^{\frac{\pi}{2}} = \rho \frac{a^3}{3}$ $\rho \frac{\pi a^2}{4} \bar{x} = \rho \frac{a^3}{3}$ $\bar{x} = \frac{4a}{3\pi}, \quad \bar{y} = \frac{4a}{3\pi} \text{ by symmetry *AG*}$	<p>B1</p> <p>M1A1,=A1</p> <p>M1</p> <p>A1A1</p> <p style="text-align: right;">(7) [15]</p>								

Question Number	Scheme	Marks
<p>7 (a)</p>	 <p>Tensions equal when P in equilibrium: $\frac{15 \times x}{0.8} = \frac{10 \times (2.4 - x)}{0.8}$</p> $25x = 24, \quad x = \frac{24}{25} = 0.96$ $AC = 1.76 \text{ (m)} \quad \text{*AG*}$	<p>M1A2 A1 (4)</p>
<p>(b)</p>	 <p>When P is distance x from C, restoring force</p> $\frac{15 \times (0.96 + x)}{0.8} - \frac{10 \times (1.44 - x)}{0.8} = \frac{25}{0.8} x = -m\ddot{x} = -0.2\ddot{x}$ $\ddot{x} = -156.25x (= -12.5^2 x) \Rightarrow \text{SHM}$	<p>M1A2 A1 (4)</p>
<p>(c)</p>	<p>Speed at C = max speed = $a\omega = 0.4 \times 12.5 = 5 \text{ (m s}^{-1}\text{)}$ their ω</p>	<p>0.4 x M1A1ft (2)</p>
<p>(d)</p>	<p>$x = a \cos \omega t$ $\dot{x} = -a\omega \sin \omega t$ $(-)^2 = (-)^2 5 \sin 12.5t$ $12.5t = 0.4115 \dots, \quad t = 0.0329 \dots \approx 0.033 \text{ (s)}$</p>	<p>their ω their ω their ω A1 (4) [14]</p>

Further copies of this publication are available from
Edexcel Publications, Adamsway, Mansfield, Notts, NG18 4FN

Telephone 01623 467467

Fax 01623 450481

Email publication.orders@edexcel.com

Order Code UA036430 Summer 2013

For more information on Edexcel qualifications, please visit our website
www.edexcel.com

Pearson Education Limited. Registered company number 872828
with its registered office at Edinburgh Gate, Harlow, Essex CM20 2JE

Ofqual




Llywodraeth Cynulliad Cymru
Welsh Assembly Government

