


- 2 (a) A detector is moved in front of two identical coherent wave sources and detects regions of constructive and destructive interference. Explain the terms:

(i) **COHERENCE.** (ii) **PATH DIFFERENCE.**

- (b) The diagram below shows two identical light sources S_1 and S_2 placed in front of a screen. The sources emit light in phase with each other.

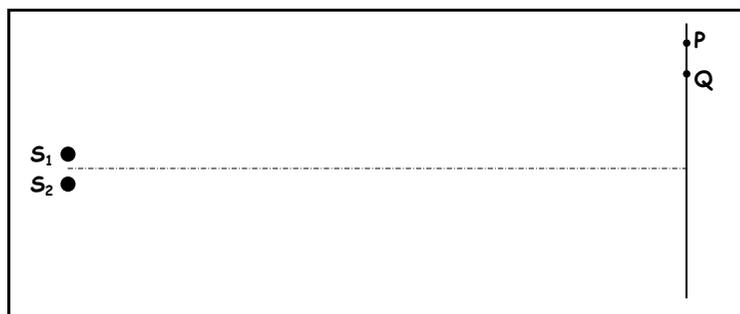

- (i) State, in terms of the path difference of the waves, the conditions necessary to produce:

1. Constructive interference at point P on the screen.
2. Destructive interference at point Q on the screen.

- (ii) The light sources S_1 and S_2 are **0.50 mm** apart. They each emit light of wavelength **4.86×10^{-7} m**. An interference pattern is produced on the screen placed **2.00 m** from the sources.


Calculate the **distance between two neighbouring bright fringes** on the screen.

- (iii) Suggest how the appearance of the interference pattern would change if coherent **WHITE** light sources were used instead of the monochromatic sources.

(OCR AS Physics - Module 2823 - June 2007)

- 3 (a) Two coherent light wavetrains meet at a point and interfere **destructively**. Explain what this means and state **two** conditions that must be fulfilled before **TOTALLY DESTRUCTIVE** interference can occur. 11

- (b) The diagram below shows an experiment to demonstrate interference effects in microwaves. A transmitter, producing microwaves of **wavelength (λ)**, is placed in front of two slits separated by a distance (**a**). A receiver is used to detect the strength of the resultant wave at different points in front of the slits.

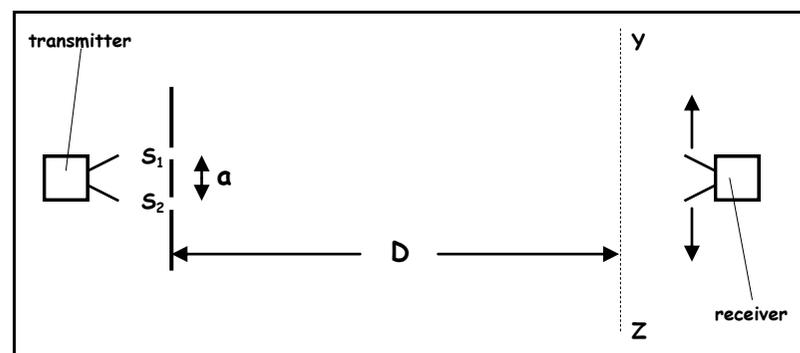

- (i) Explain in terms of the path difference between the wave trains, emerging from the slits S_1 and S_2 , why a series of interference maxima are produced along the line YZ.

- (ii) Assuming that the interference of the microwaves is similar to the double-slit interference using light, state in terms of a , D and λ , an expression for the distance x between neighbouring **minima** on the line YZ.

- (iii) Use your answer to (ii) to predict how x would change if the **distance a was doubled**.

- (c) Explain why it is necessary to use a barrier with two slits rather than two separate transmitters.

(OCR AS Physics - Module 2823 - May 2002)

FXA © 2008