



ADVANCED GCE

MATHEMATICS (MEI)

Applications of Advanced Mathematics (C4) Paper B: Comprehension

INSERT

4754B

Tuesday 13 January 2009
Morning

Duration: Up to 1 hour



INSTRUCTIONS TO CANDIDATES

- This insert contains the text for use with the questions.

INFORMATION FOR CANDIDATES

- This document consists of **8** pages. Any blank pages are indicated.

Measuring the volume of fuel in a tank

Introduction

In many cars, aeroplanes and other vehicles, there is a display which provides information about various aspects of the engine system. This includes, for example, the temperature of the engine, the rate of fuel consumption and the volume of fuel remaining in the tank. This information is generated from measurements made by electronic sensors.

5

This article is concerned with the mathematics involved in calculating the volume of fuel in a fuel tank using measurements made by sensors in the tank.

When positioning sensors in a fuel tank, there are two major factors to consider. These are the shape of the tank and the possible orientations to the horizontal that the tank might experience during motion.

10

The shapes of fuel tanks in aircraft wings are determined by the shape of the wings. Consequently, aircraft fuel tanks have complex shapes and advanced mathematical techniques are required in order to calculate the volume of fuel in the tanks. In contrast, the fuel tanks in cars are not tightly constrained by the shape of the car and so can have relatively simple shapes.

15

Aircraft often fly at extreme angles to the horizontal. The sensors in the fuel tanks need to be positioned in such a way that they can always give meaningful measurements which can be used to calculate the volume of fuel in the tank.

Two shapes of tanks are considered in this article: a cylindrical tank, as an approximation to the fuel tanks used in some cars, and a trapezoidal tank, as an approximation to those used in some aircraft.

20

Cylindrical tanks

On level ground

Fig. 1 shows a vertical cylindrical tank with radius 20 cm and height 50 cm containing fuel to a depth of d cm.

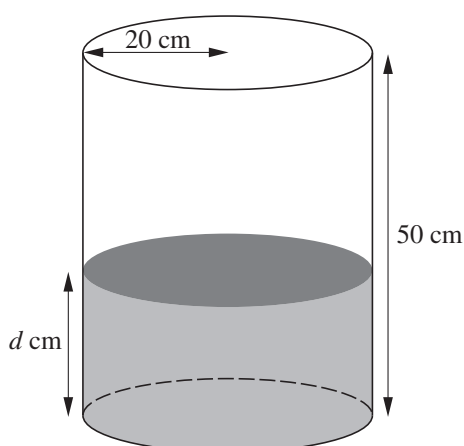


Fig. 1

The relationship between the depth, d cm, and volume, V litres, of the fuel is given by the formula

25

$$V = \frac{1}{1000} \times \pi \times 20^2 \times d.$$

For a cylindrical tank in this position, a sensor inside the tank would need to measure only the distance between the surface of the fuel and the top of the tank in order to calculate the volume of fuel.

The system could be set so that, if the volume of fuel drops below a certain amount, a warning light comes on. For example, if the critical volume is set as 10 litres, the warning light comes on when $d = 8$. 30

On a shallow incline

Figs. 2.1 and 2.2 (a vertical section) show the tank with its base inclined at an angle θ to the horizontal, where $\tan \theta = \frac{H-h}{40}$. PQ represents the surface of the fuel; PP' and Q'Q are parallel to the base of the tank. 35

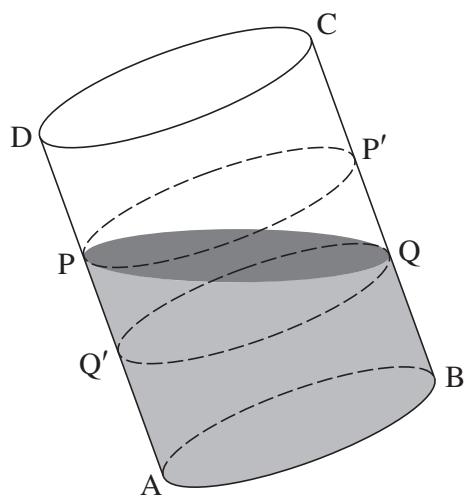


Fig. 2.1

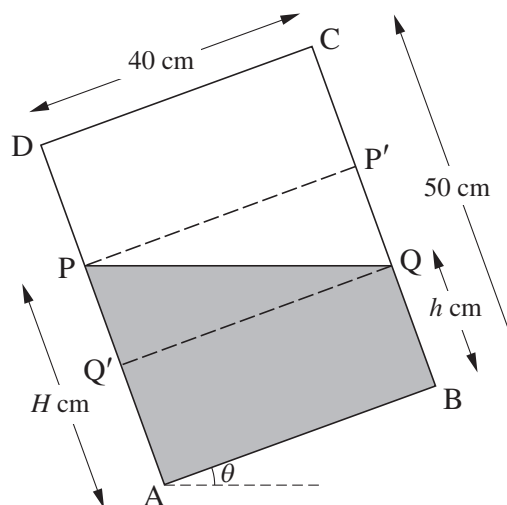


Fig. 2.2

The part of the tank between PP' and Q'Q is divided into two congruent halves by the surface of the fuel. Therefore the volume of the fuel in the tank can be calculated by adding the volume of the cylinder ABQQ' to half of the volume of the cylinder Q'QP'P. It follows that the volume, V litres, is given by 40

$$V = \frac{1}{5}\pi(H + h). \quad (1)$$

Two sensors could measure the distances DP and CQ. These measurements could then be used to calculate the volume of fuel in the tank. Alternatively, one of these sensors could be used together with a different sensor which measures θ to calculate this volume.

Table 3 shows some possible values of h , H and θ for which this tank is three-quarters full. Notice that when $\theta = 32.0^\circ$, the surface of the fuel touches the top of the tank at D. 45

h	37.5	35	32.5	30	27.5	25
H	37.5	40	42.5	45	47.5	50
θ	0°	7.1°	14.0°	20.6°	26.6°	32.0°


Table 3

In this case, and for any other volume of fuel in the tank, there is an angle of inclination beyond which equation (1) will no longer apply.

On a steep incline

Fig. 4 shows a vertical section of the tank inclined at a steep angle to the horizontal.

50

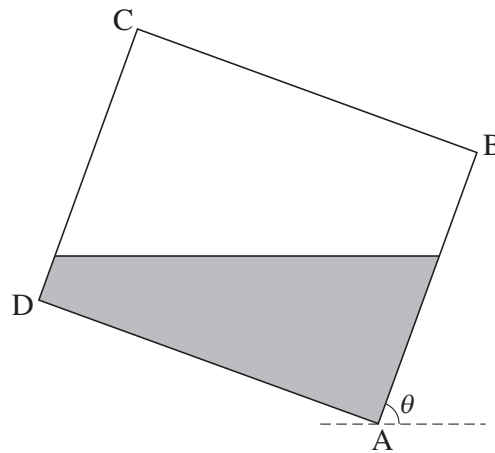**Fig. 4**

Sensors designed to measure the distance of the surface of the fuel from D along DA and from C along CB would no longer provide useful information.

This is not a serious issue for cars with such tanks since the steepest roads have an angle of inclination of only about 15° .

Fuel tanks in aircraft

55

In aircraft, the shapes of fuel tanks are determined by the shape of the wing. Calculating the volume of fuel in such tanks requires advanced modelling and computational techniques.


A trapezoidal tank is considered below as an approximation to an aircraft fuel tank. The calculations give an indication of the way in which the volumes of such shapes are calculated.

Trapezoidal tanks

60

On level ground

Fig. 5 shows a trapezoidal tank; it is a prism with an isosceles trapezium cross-section.

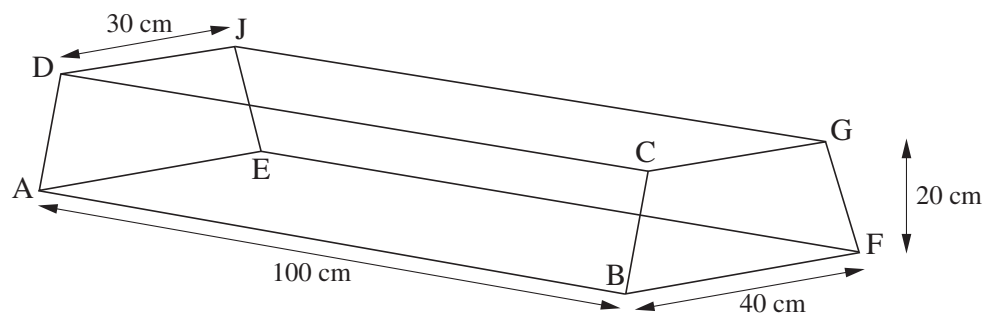**Fig. 5**

5

The capacity of this tank is

$$\frac{1}{2} \times 20 \times (30 + 40) \times 100 \text{ cm}^3 = 70 \text{ litres.}$$

Fig. 6 shows the cross-section of the tank when it contains fuel to a depth of y cm.

65

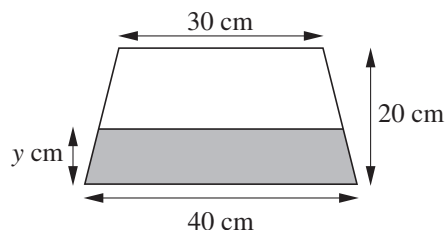


Fig. 6

The shaded area, $A \text{ cm}^2$, in Fig. 6 is given by

$$A = \frac{1}{2} \times y \times \left(80 - \frac{y}{2}\right).$$

The volume, V litres, of fuel in the tank is given by

$$V = \frac{1}{2} \times y \times \left(80 - \frac{y}{2}\right) \times \frac{1}{10}. \quad (2)$$

A sensor in this tank could be set so that, if the volume drops to 10 litres, a warning light comes on. This happens when y satisfies the equation

70

$$\frac{1}{2} \times y \times \left(80 - \frac{y}{2}\right) \times \frac{1}{10} = 10.$$

This equation simplifies to

$$y^2 - 160y + 400 = 0.$$

By solving this equation, it can be shown that the warning light comes on when the depth of the fuel drops to 2.54 cm.

75

On a shallow incline

The tank in Fig. 5, containing fuel, is now tilted about the edge AE. Fig. 7 shows a vertical section of the tank.

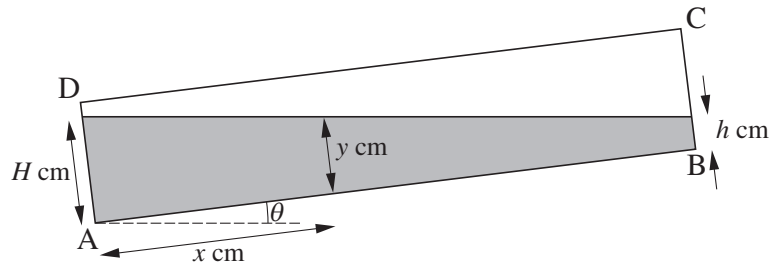


Fig. 7

The two ends of the tank and a cross-section parallel to them are shown in Fig. 8. The distance of the cross-section from the end AEJD is x cm, where $0 \leq x \leq 100$. 80

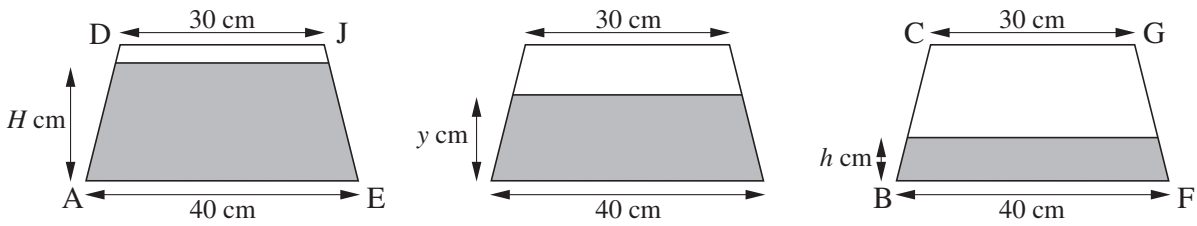


Fig. 8

The relationship between y , as shown in Figs. 7 and 8, and x is given by

$$y = H - \frac{H - h}{100}x. \quad (3)$$

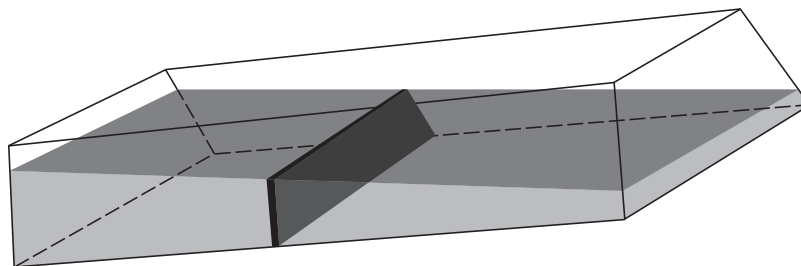


Fig. 9

To calculate the volume of fuel in the tank in Fig. 7, you can think of the region occupied by the fuel as being made up of a large number of thin trapezoidal prisms like the one shown in Fig. 9. It can then be shown that the volume, V litres, of fuel is given by 85

$$V = \frac{1}{1000} \int_0^{100} \frac{y}{2} \left(80 - \frac{y}{2} \right) dx. \quad (4)$$

For example, if sensors indicate that $H = 20$ and $h = 0$, then equation (3) gives $y = 20 - \frac{1}{5}x$. Equation (4) then gives a volume of $36\frac{2}{3}$ litres.

Similarly, if $H = h = 10$, then equation (4) gives a volume of 37.5 litres. Since in this case the tank is on level ground, the volume could have been found using equation (2). 90

On a steep incline

Fig. 10 shows a vertical section of the tank at a steeper angle of inclination to the horizontal.

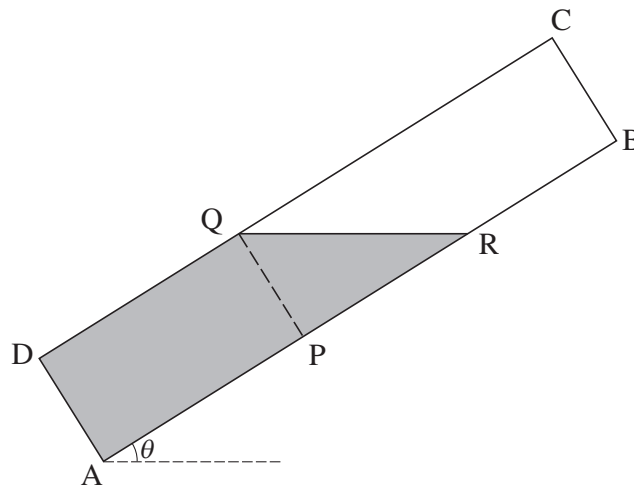


Fig. 10

The techniques required to calculate the volume indicated in Fig. 10 are similar to those used in deriving equation (4). Sensors measure the distances BR and CQ which are needed in order to calculate this volume.

95

In conclusion

Sensors in aircraft do much more than measure the volume of fuel in the tank. When designing and testing tanks for use in aircraft, sensors provide information about the movement of fuel in the tank. It is crucially important to ensure that, at all times, fuel is being sucked from the tanks into the engines. Sensors allow the designers and engineers to ensure that the shapes of the tanks meet these crucial requirements.

100



Permission to reproduce items where third-party owned material protected by copyright is included has been sought and cleared where possible. Every reasonable effort has been made by the publisher (OCR) to trace copyright holders, but if any items requiring clearance have unwittingly been included, the publisher will be pleased to make amends at the earliest possible opportunity.

OCR is part of the Cambridge Assessment Group. Cambridge Assessment is the brand name of University of Cambridge Local Examinations Syndicate (UCLES), which is itself a department of the University of Cambridge.