
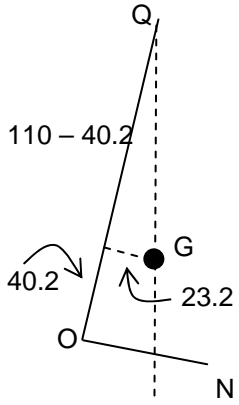


4762 Mechanics 2

<p>1 (a) (i)</p>	<p>Let vel of Q be $v \rightarrow$ $6 \times 1 = 4v + 2 \times 4$</p> <p>$v = -0.5$ so 0.5 m s^{-1} in opposite direction to R</p>	<p>M1 A1 A1 A1</p>	<p>Use of PCLM Any form Direction must be made clear. Accept -0.5 only if + ve direction clearly shown</p>	<p>4</p>
<p>(ii)</p>	<p>Let velocities after be R: $v_R \rightarrow$; S: $v_S \rightarrow$</p> <p>PCLM +ve $\rightarrow 4 \times 2 - 1 \times 3 = 2v_R + 3v_S$ $2v_R + 3v_S = 5$</p> <p>NEL +ve \rightarrow $\frac{v_S - v_R}{-1-4} = -0.1$ so $v_S - v_R = 0.5$</p> <p>Solving gives $v_R = 0.7 \rightarrow$ $v_S = 1.2 \rightarrow$</p>	<p>M1 A1 M1 A1 A1 A1</p>	<p>PCLM Any form NEL Any form Direction not required Direction not required Award cao for 1 vel and FT second</p>	<p>6</p>
<p>(iii)</p>	<p>R and S separate at 0.5 m s^{-1}</p> <p>Time to drop T given by $0.5 \times 9.8T^2 = 0.4$ so $T = \frac{2}{7}$ (0.28571...) so distance is $\frac{2}{7} \times 0.5 = \frac{1}{7} \text{ m}$ (0.142857...m)</p>	<p>M1 B1 A1</p>	<p>FT their result above. Either from NEL or from difference in final velocities cao</p>	<p>3</p>
<p>(b)</p>	 <p>$u \rightarrow u$ $v \rightarrow (-)ev$</p> <p>KE loss is $\frac{1}{2}m(u^2 + v^2) - \frac{1}{2}m(u^2 + e^2v^2)$ $= \frac{1}{2}mu^2 + \frac{1}{2}mv^2 - \frac{1}{2}mu^2 - \frac{1}{2}me^2v^2$ $= \frac{1}{2}mv^2(1 - e^2)$</p>	<p>B1 B1 M1 E1</p>	<p>Accept $v \rightarrow ev$ Attempt at difference of KEs Clear expansion and simplification of correct expression</p>	<p>4</p>
				<p>17</p>

2(i)	GPE is $1200 \times 9.8 \times 60 = 705\,600$ Power is $(705\,600 + 1\,800\,000) \div 120$ $= 20\,880\text{ W} = 20\,900\text{ W}$ (3 s. f.)	B1 M1 B1 A1	Need not be evaluated power is $WD \div \text{time}$ 120 s cao	4
(ii)	Using $P = Fv$. Let resistance be $R\text{ N}$ $13500 = 18F$ so $F = 750$ As v const, $a = 0$ so $F - R = 0$ Hence resistance is 750 N We require $750 \times 200 = 150\,000\text{ J}$ (= 150 kJ)	M1 A1 E1 M1 F1	Use of $P = Fv$. Needs some justification Use of $WD = Fd$ or Pt FT their F	5
(iii)	$\frac{1}{2} \times 1200 \times (9^2 - 18^2)$ $= 1200 \times 9.8 \times x \sin 5 - 1500x$ Hence $145800 = 475.04846 \dots x$ so $x = 306.91 \dots$ so 307 m (3 s, f.)	M1 B1 M1 A1 A1 A1	Use of W-E equation with ' x ' 2 KE terms present GPE term with resolution GPE term correct All correct cao	6
(iv)	$P = Fv$ and N2L gives $F - R = 1200a$ Substituting gives $P = (R + 1200a)v$ If $a \neq 0$, v is not constant. But P and R are constant so a cannot be constant.	B1 B1 E1 E1	Shown	4
				19
3 (i) (A)	Let force be P a.c. moments about C $P \times 0.125 - 340 \times 0.5 = 0$ $P = 1360$ so 1360 N	M1 A1 A1	Moments about C. All forces present. No extra forces. Distances correct cao	3
(i) (B)	Let force be P c.w. moments about E $P \times 2.125 - 340 \times (2 - 0.5) = 0$ $P = 240$ so 240 N	M1 A1 A1	Moments about E. All forces present. No extra forces. Distances correct cao	3

(ii)	$Q \sin \theta \times 2.125 + Q \cos \theta \times 0.9$ $= \frac{25.5Q}{13} + \frac{4.5Q}{13}$ $= \frac{30Q}{13} \text{ so } \frac{30Q}{13} \text{ N m}$	M1 B1 E1	Moments expression. Accept $s \leftrightarrow c$. Correct trig ratios or lengths Shown	3
(iii)	We need $\frac{30Q}{13} = 340 \times 1.5$ so $Q = 221$ Let friction be F and normal reaction R Resolve \rightarrow $221 \cos \theta - F = 0$ so $F = 85$ Resolve \uparrow $221 \sin \theta + R = 340$ so $R = 136$ $F < \mu R$ as not on point of sliding so $85 < 136\mu$ so $\mu > \frac{5}{8}$	M1 E1 M1 A1 M1 A1 M1 A1 E1	Moments equn with all relevant forces Shown Accept \leq or = Accept \leq . FT their F and R	9
				18
4 (i)	$4000 \begin{pmatrix} \bar{x} \\ \bar{y} \end{pmatrix} = 4800 \begin{pmatrix} 30 \\ 40 \end{pmatrix} - 800 \begin{pmatrix} 50 \\ 20 \end{pmatrix}$ so $\bar{x} = 26$ $\bar{y} = 44$	M1 A1 E1 A1	Any complete method for c.m. Either one RHS term correct or one component of both RHS terms correct [SC 2 for correct \bar{y} seen if M 0]	4
(ii)	$250 \begin{pmatrix} \bar{x} \\ \bar{y} \end{pmatrix}$ $= 110 \begin{pmatrix} 0 \\ 55 \end{pmatrix} + 40 \begin{pmatrix} 20 \\ 0 \end{pmatrix} + 40 \begin{pmatrix} 40 \\ 20 \end{pmatrix} + 20 \begin{pmatrix} 50 \\ 40 \end{pmatrix} + 40 \begin{pmatrix} 60 \\ 60 \end{pmatrix}$ $\bar{x} = 23.2$ $\bar{y} = 40.2$	M1 B1 B1 E1 A1	Any complete method for c.m. Any 2 edges correct mass and c.m. or any 4 edges correct with mass and x or y c.m. coordinate correct. At most one consistent error	5

<p>(iii)</p>	 <p>Angle is $\arctan\left(\frac{23.2}{110-40.2}\right)$</p> <p>= 18.3856.... so 18.4° (3 s. f.)</p>	<p>B1 Indicating c.m. vertically below Q</p> <p>B1 Clearly identifying correct angle (may be implied) and lengths</p> <p>M1 Award for $\arctan\left(\frac{b}{a}\right)$ where $b = 23.2$ and $a = 69.8$ or 40.2 or where $b = 69.8$ or 40.2 and $a = 23.2$. Allow use of their value for y only.</p> <p>A1 cao</p>	<p>4</p>
<p>(iv)</p>	$10\left(\frac{\bar{x}}{\bar{y}}\right) = 2 \times 1.5 \times \left(\frac{26}{44}\right) + 7\left(\frac{23.2}{40.2}\right)$ <p>$\bar{x} = 24.04$ so 24.0 (3 s.f.)</p> <p>$\bar{y} = 41.34$ so 41.3 (3 s.f.)</p>	<p>M1 Combining the parts using masses</p> <p>B1 Using both ends</p> <p>A1 All correct</p> <p>A1 cao</p> <p>F1 FT their y values only.</p>	<p>5</p>
			<p>18</p>