



Mark Scheme (Results)

October 2019

Pearson Edexcel International Advanced Level
In Physics (WPH12) Paper 01
Waves and Electricity

Edexcel and BTEC Qualifications

Edexcel and BTEC qualifications are awarded by Pearson, the UK's largest awarding body. We provide a wide range of qualifications including academic, vocational, occupational and specific programmes for employers. For further information visit our qualifications websites at www.edexcel.com or www.btec.co.uk. Alternatively, you can get in touch with us using the details on our contact us page at www.edexcel.com/contactus.

Pearson: helping people progress, everywhere

Pearson aspires to be the world's leading learning company. Our aim is to help everyone progress in their lives through education. We believe in every kind of learning, for all kinds of people, wherever they are in the world. We've been involved in education for over 150 years, and by working across 70 countries, in 100 languages, we have built an international reputation for our commitment to high standards and raising achievement through innovation in education. Find out more about how we can help you and your students at: www.pearson.com/uk

October 2019

Publications Code WPH12_01_1910_MS

All the material in this publication is copyright

© Pearson Education Ltd 2019

General Marking Guidance

- All candidates must receive the same treatment. Examiners must mark the first candidate in exactly the same way as they mark the last.
- Mark schemes should be applied positively. Candidates must be rewarded for what they have shown they can do rather than penalised for omissions.
- Examiners should mark according to the mark scheme not according to their perception of where the grade boundaries may lie.
- There is no ceiling on achievement. All marks on the mark scheme should be used appropriately.
- All the marks on the mark scheme are designed to be awarded. Examiners should always award full marks if deserved, i.e. if the answer matches the mark scheme. Examiners should also be prepared to award zero marks if the candidate's response is not worthy of credit according to the mark scheme.
- Where some judgement is required, mark schemes will provide the principles by which marks will be awarded and exemplification may be limited.
- When examiners are in doubt regarding the application of the mark scheme to a candidate's response, the team leader must be consulted.
- Crossed out work should be marked UNLESS the candidate has replaced it with an alternative response.

Mark scheme notes

Underlying principle

The mark scheme will clearly indicate the concept that is being rewarded, backed up by examples. It is not a set of model answers.

For example:

(iii) Horizontal force of hinge on table top

66.3 (N) or 66 (N) **and** correct indication of direction [no ue] ✓ 1
 [Some examples of direction: acting from right (to left) / to the left / West /
 opposite direction to horizontal. May show direction by arrow. Do not accept a
 minus sign in front of number as direction.]

This has a clear statement of the principle for awarding the mark, supported by some examples illustrating acceptable boundaries.

1. Mark scheme format

- 1.1 You will not see 'wtte' (words to that effect). Alternative correct wording should be credited in every answer unless the ms has specified specific words that must be present. Such words will be indicated by underlining e.g. 'resonance'
- 1.2 Bold lower case will be used for emphasis.
- 1.3 Round brackets () indicate words that are not essential e.g. "(hence) distance is increased".
- 1.4 Square brackets [] indicate advice to examiners or examples e.g. [Do not accept gravity] [ecf].

2. Unit error penalties

- 2.1 A separate mark is not usually given for a unit but a missing or incorrect unit will normally mean that the final calculation mark will not be awarded.
- 2.2 Incorrect use of case e.g. 'Watt' or 'w' will **not** be penalised.
- 2.3 There will be no unit penalty applied in 'show that' questions or in any other question where the units to be used have been given, for example in a spreadsheet.
- 2.4 The same missing or incorrect unit will not be penalised more than once within one question (one clip in open).
- 2.5 Occasionally, it may be decided not to penalise a missing or incorrect unit e.g. the candidate may be calculating the gradient of a graph, resulting in a unit that is not one that should be known and is complex.
- 2.6 The mark scheme will indicate if no unit error penalty is to be applied by means of [no ue].

3. Significant figures

- 3.1 Use of an inappropriate number of significant figures in the theory papers will normally only be penalised in 'show that' questions where use of too few significant figures has resulted in the candidate not demonstrating the validity of the given answer.
- 3.2 The use of $g = 10 \text{ m s}^{-2}$ or 10 N kg^{-1} instead of 9.81 m s^{-2} or 9.81 N kg^{-1} will be penalised by one mark (but not more than once per clip). Accept 9.8 m s^{-2} or 9.8 N kg^{-1}

4. Calculations

- 4.1 Bald (i.e. no working shown) correct answers score full marks unless in a ‘show that’ question.
- 4.2 If a ‘show that’ question is worth 2 marks then both marks will be available for a reverse working; if it is worth 3 marks then only 2 will be available.
- 4.3 **use** of the formula means that the candidate demonstrates substitution of physically correct values, although there may be conversion errors e.g. power of 10 error.
- 4.4 **recall** of the correct formula will be awarded when the formula is seen or implied by substitution.
- 4.5 The mark scheme will show a correctly worked answer for illustration only.
- 4.6 Example of mark scheme for a calculation:

‘Show that’ calculation of weight

Use of $L \times W \times H$ ✓

Substitution into density equation with a volume and density ✓

Correct answer [49.4 (N)] to at least 3 sig fig. [No ue] ✓

[If 5040 g rounded to 5000 g or 5 kg, do not give 3rd mark; if conversion to kg is omitted and then answer fudged, do not give 3rd mark]

[Bald answer scores 0, reverse calculation 2/3]

3

Example of answer:

$$80 \text{ cm} \times 50 \text{ cm} \times 1.8 \text{ cm} = 7200 \text{ cm}^3$$

$$7200 \text{ cm}^3 \times 0.70 \text{ g cm}^{-3} = 5040 \text{ g}$$

$$5040 \times 10^{-3} \text{ kg} \times 9.81 \text{ N/kg}$$

$$= 49.4 \text{ N}$$

5. Quality of Written Communication

- 5.1 Indicated by QoWC in mark scheme. QWC – Work must be clear and organised in a logical manner using technical wording where appropriate.
- 5.2 Usually it is part of a max mark, the final mark not being awarded unless the QoWC condition has been satisfied.

6. Graphs

- 6.1 A mark given for axes requires both axes to be labelled with quantities and units, and drawn the correct way round.
- 6.2 Sometimes a separate mark will be given for units or for each axis if the units are complex. This will be indicated on the mark scheme.
- 6.3 A mark given for choosing a scale requires that the chosen scale allows all points to be plotted, spreads plotted points over more than half of each axis and is not an awkward scale e.g. multiples of 3, 7 etc.
- 6.4 Points should be plotted to within 1 mm.
 - Check the two points furthest from the best line. If both OK award mark.
 - If either is 2 mm out do not award mark.
 - If both are 1 mm out do not award mark.
 - If either is 1 mm out then check another two and award mark if both of these OK, otherwise no mark.

For a line mark there must be a thin continuous line which is the best-fit line for the candidate’s results.

Question Number	Answer	Mark
1	<p>C is the correct answer as the resistance of both listed components decreases as the applied potential difference increases.</p> <p>A is not the correct answer as the resistance of an ohmic conductor remains constant when the applied potential difference increases. B is not the correct answer as the resistance of a filament lamp increases when the applied potential difference increases. D is not the correct answer as the resistance of a filament lamp increases when the applied potential difference increases.</p>	(1)
2	<p>A is the correct answer as this represents the current in the internal resistance multiplied by the p.d. across the internal resistance.</p> <p>B is not the correct answer as this is the power dissipated by the external resistance C is not the correct answer as this is the power dissipated by the whole circuit. D is not the correct answer as this equation combines the p.d. across the external resistance with the value for the internal resistance – as a result, it does not represent the power of any of the components in the circuit</p>	(1)
3	<p>B is the correct answer as $n_{\text{water}} \times v_{\text{water}} = n_{\text{glass}} \times v_{\text{glass}}$</p> <p>A is not the correct answer as $n_{\text{water}} \times v_{\text{water}} = n_{\text{glass}} \times v_{\text{glass}}$ C is not the correct answer as $n_{\text{water}} \times v_{\text{water}} = n_{\text{glass}} \times v_{\text{glass}}$ D is not the correct answer as $n_{\text{water}} \times v_{\text{water}} = n_{\text{glass}} \times v_{\text{glass}}$</p>	(1)
4	<p>B is the correct answer as increasing light intensity increases the number of electrons released per second (N), but does not affect the maximum kinetic energy of each released electron (E_k)</p> <p>A is not the correct answer as the graphs show no effect on N and an effect on E_k C is not the correct answer as the graphs show an effect on E_k D is not the correct answer as the graphs show no effect on N</p>	(1)
5	<p>A is the correct answer $v = I/nAq$ – doubling d quadruples A, and with n doubling also, the denominator is 8 times larger</p> <p>B is not the correct answer as A is quadrupled and n is doubled (factor of 8 overall) C is not the correct answer as A is quadrupled and n is doubled (factor of 8 overall) D is not the correct answer as A is quadrupled and n is doubled (factor of 8 overall)</p>	(1)
6	<p>B is the correct answer as polarisation only occurs in transverse waves</p> <p>A is not the correct answer as diffraction can be demonstrated for all waves C is not the correct answer as refraction can be demonstrated for all waves D is not the correct answer as superposition can be demonstrated for all waves</p>	(1)
7	<p>D is the correct answer as efficiency is the useful power output (250W) divided by the total power input (Intensity x Area).</p> <p>A is not the correct answer as this is $(\text{Power} \times \text{Area}) / \text{Intensity}$ B is not the correct answer as this is $\text{Intensity} / (\text{Power} \times \text{Area})$ C is not the correct answer as this is the reciprocal of the efficiency equation</p>	(1)
8	<p>D is the correct answer as $P = V^2/R$, so for a constant resistance, doubling V results in P quadrupling.</p> <p>A is not the correct answer as this suggests that P is constant regardless of V B is not the correct answer as this suggests that P is directly proportional to V C is not the correct answer as this suggests that doubling P quadruples V</p>	(1)

9	B is the correct answer as $7\lambda/4$ represents 3.5 radians, which is 1.5π radians out of phase. A is not the correct answer as $3\lambda/2$ represents 3π radians which is antiphase C is not the correct answer as 3λ represents 6π radians which is in phase D is not the correct answer as $7\lambda/2$ represents 7π radians, which is antiphase	(1)
10	B is the correct answer as $n\lambda = d\sin\theta$, and reducing d would increase $\sin\theta$ if n and λ remain the same. A is not the correct answer as this would result in the maxima being closer together C is not the correct answer as this would have no effect on the distance D is not the correct answer as this would result in the maxima being closer together	(1)

Question Number	Answer	Mark
11	Use of $E = hf$ (1) Converts J to eV (1) Transition from (-) 0.54eV to (-) 0.85eV (1) <u>Example of calculation</u> $E = hf = (6.63 \times 10^{-34} \text{ Js}) \times (7.48 \times 10^{13} \text{ Hz}) = 4.96 \times 10^{-20} \text{ J}$ $4.96 \times 10^{-20} \text{ J} / (1.60 \times 10^{-19} \text{ J eV}^{-1}) = 0.31 \text{ eV}$	(3)
	Total for question 11	3

Question Number	Answer	Mark
12a	Use of $p = mv$ for electron ($m = 9.11 \times 10^{-31} \text{ kg}$ used) (1) Use of $\lambda = h/p$ (1) Speed of car = $1.5 \times 10^{-26} \text{ (m s}^{-1} \text{ which is very small)}$ so student suggestion is correct. (1)	(3)
	<u>Example of calculation</u> p for electron = $(9.11 \times 10^{-31} \text{ kg}) (1.5 \times 10^7 \text{ m s}^{-1}) = 1.37 \times 10^{-23} \text{ kgms}^{-1}$ λ for electron = $(6.63 \times 10^{-34} \text{ Js}) / (1.37 \times 10^{-23} \text{ m})$ $= 4.8 \times 10^{-11} \text{ m}$. For the car, $4.8 \times 10^{-11} \text{ m} = (6.63 \times 10^{-34} \text{ Js}) / (900 \text{ kg}) v$ $v = 1.5 \times 10^{-26} \text{ m s}^{-1}$	
12b	The car is not a single particle Or The car does not behave like a wave/particle Or de Broglie equation has only been demonstrated for microscopic particles (1)	(1)
	Total for question 12	4

Question Number	Answer	Mark
13a	Use of $V=W/Q$ (1) $W = 7.92 \times 10^5 \text{ J}$ (1) <u>Example of calculation</u> $W = V \times Q = 22 \times 36,000 = 792,000 \text{ J}$	(2)
13bi	Use of speed = distance/time (1) Time = 0.45 s (1) (Accept 7.5×10^{-3} minutes or 1.25×10^{-4} hours) <u>Example of calculation</u> $16 \text{ km hr}^{-1} = 16,000 \text{ m} / 3,600 \text{ s} = 4.4 \text{ m s}^{-1}$ Time = distance / speed = $2.0 \text{ m} / 4.4 \text{ m s}^{-1} = 0.45 \text{ seconds}$.	(2)
13bii	Use of $I = Q / t$ (1) Calculates total charge used in 2.00 m (1) Number of electrons = 4.2×10^{19} (1) (e.c.f. from (i)) OR Use of speed = distance / time (1) Calculates total charge used in 2.00m (1) Number of electrons = 4.2×10^{19} (1) (no e.c.f. required from (i) for this method) <u>Example of calculation</u> $I = Q / t = 36,000 \text{ C} / (40 \times 60) \text{ s} = 15 \text{ A}$ Total charge used in 2.00m = $I \times t = 15 \text{ A} \times 0.45 \text{ s} = 6.75 \text{ C}$ number of electrons = $6.75 \text{ C} / 1.6 \times 10^{-19} \text{ C} = 4.2 \times 10^{19}$	(3)
	Total for question 13	7

Question Number	Answer	Mark																				
*14a	<p>This question assesses a student's ability to show a coherent and logically structured answer with linkages and fully-sustained reasoning.</p> <p>Marks are awarded for indicative content and for how the answer is structured and shows lines of reasoning.</p> <p>The following table shows how the marks should be awarded for indicative content.</p> <table border="1" data-bbox="316 555 727 898"> <thead> <tr> <th>Number of indicative marking points seen in answer</th> <th>Number of marks awarded for indicative marking points</th> </tr> </thead> <tbody> <tr> <td>6</td> <td>4</td> </tr> <tr> <td>5-4</td> <td>3</td> </tr> <tr> <td>3-2</td> <td>2</td> </tr> <tr> <td>1</td> <td>1</td> </tr> <tr> <td>0</td> <td>0</td> </tr> </tbody> </table> <p>The following table shows how the marks should be awarded for structure and lines of reasoning.</p> <table border="1" data-bbox="316 1010 1230 1440"> <thead> <tr> <th></th> <th>Number of marks awarded for structure of answer and sustained line of reasoning</th> </tr> </thead> <tbody> <tr> <td>Answer shows a coherent and logical structure with linkages and fully sustained lines of reasoning demonstrated throughout</td> <td>2</td> </tr> <tr> <td>Answer is partially structured with some linkages and lines of reasoning</td> <td>1</td> </tr> <tr> <td>Answer has no linkages between points and is unstructured</td> <td>0</td> </tr> </tbody> </table> <p>Indicative content</p> <ul style="list-style-type: none"> • When temperature is higher, greater energy to electrons (in thermistor) • When temperature is higher, more conduction/free electrons • When temperature is higher, lower resistance in thermistor • Decreased p.d. across thermistor / YZ Or current in circuit/thermistor increases • Increased p.d. across fixed resistor Or increased p.d. across XY • So for the air conditioning application, secondary circuit should be across XY <p>(Allow converse statements for IC 1,2, 3 and 4) (Do not allow contradicting statements for IC4 e.g. lower V so lower I)</p>	Number of indicative marking points seen in answer	Number of marks awarded for indicative marking points	6	4	5-4	3	3-2	2	1	1	0	0		Number of marks awarded for structure of answer and sustained line of reasoning	Answer shows a coherent and logical structure with linkages and fully sustained lines of reasoning demonstrated throughout	2	Answer is partially structured with some linkages and lines of reasoning	1	Answer has no linkages between points and is unstructured	0	(6)
Number of indicative marking points seen in answer	Number of marks awarded for indicative marking points																					
6	4																					
5-4	3																					
3-2	2																					
1	1																					
0	0																					
	Number of marks awarded for structure of answer and sustained line of reasoning																					
Answer shows a coherent and logical structure with linkages and fully sustained lines of reasoning demonstrated throughout	2																					
Answer is partially structured with some linkages and lines of reasoning	1																					
Answer has no linkages between points and is unstructured	0																					

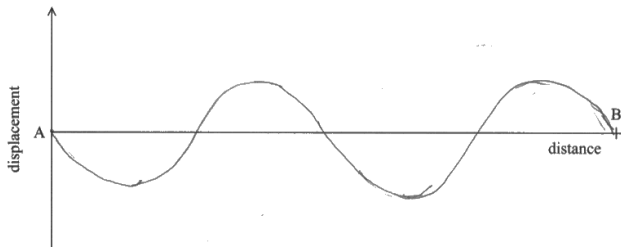
14b	Ratio of p.d.s to resistances	(1)	(3)
	See either 775Ω or 263Ω for light dependent resistor	(1)	
	Difference = $(-) 512 \Omega$	(1)	
	Or		
	Use of $R = V/I$ to calculate current	(1)	
	See either 775Ω or 263Ω for light dependent resistor	(1)	
	Difference = $(-) 512 \Omega$	(1)	
<u>Example of calculation</u>			
$\frac{7.29 \text{ V}}{4.71 \text{ V}} = \frac{1200 \Omega}{R}$ so $R = 775 \Omega$			
$\frac{9.84 \text{ V}}{2.16 \text{ V}} = \frac{1200 \Omega}{R}$ so $R = 263 \Omega$			
Difference in resistance = $263 \Omega - 775 \Omega = (-) 512 \Omega$			
Total for question 14			9

Question Number	Answer	Mark																								
15a	<u>Diameter</u> of wire with a micrometer or digital calliper (1)	(3)																								
	<u>Length</u> of wire using a metre rule (1)																									
	Potential difference (in parallel with the wire) with a voltmeter and current (in series with the wire) with an ammeter Or resistance, using an ohmmeter (in parallel with the wire) (1)																									
15b	Use of πr^2 or $\pi d^2/4$ (1)	(3)																								
	Suitable axes (1)																									
	Corresponding gradient to give resistivity (MP3 dependent on MP2) (1)																									
	Some examples of appropriate axes																									
	<table border="1"> <thead> <tr> <th>y-axis</th> <th>x-axis</th> <th>gradient</th> </tr> </thead> <tbody> <tr> <td>R</td> <td>l</td> <td>ρ / A</td> </tr> <tr> <td>R</td> <td>l/A</td> <td>ρ</td> </tr> <tr> <td>RA</td> <td>l</td> <td>ρ</td> </tr> <tr> <td>l</td> <td>R</td> <td>A / ρ</td> </tr> <tr> <td>l</td> <td>RA</td> <td>$1 / \rho$</td> </tr> <tr> <td>l/A</td> <td>R</td> <td>$1 / \rho$</td> </tr> <tr> <td>V</td> <td>Il</td> <td>ρ / A</td> </tr> </tbody> </table>	y-axis	x-axis	gradient	R	l	ρ / A	R	l/A	ρ	RA	l	ρ	l	R	A / ρ	l	RA	$1 / \rho$	l/A	R	$1 / \rho$	V	Il	ρ / A	
y-axis	x-axis	gradient																								
R	l	ρ / A																								
R	l/A	ρ																								
RA	l	ρ																								
l	R	A / ρ																								
l	RA	$1 / \rho$																								
l/A	R	$1 / \rho$																								
V	Il	ρ / A																								
Total for question 15		6																								

Question Number	Answer	Mark
16a	(Two) waves travelling in opposite directions Or Wave reflected back on itself	(1)
	Superposition / interference occurs	(1)
16bi	Units of u are ms^{-1} and units of d are m	(1)
	Units of f are s^{-1}	(1)
16bii	Use of $v = \sqrt{T/\mu}$	(1)
	Recognises that $\lambda = 2L/3$ Or states that $\lambda = 0.22$ m	(1)
	Uses their <u>calculated</u> v and their λ in $v = f\lambda$ to establish f	(1)
	Use of $f = Ku/d$ with their f to establish u	(1)
	$u = 1.1 \text{ ms}^{-1}$	(1)
	Example of calculation $v = \sqrt{T/\mu} = \sqrt{63\text{N} / 0.58 \times 10^{-3} \text{ kgm}^{-1}} = 330 \text{ ms}^{-1}$ $\lambda = 2L/3 = (2 \times 0.33 / 3) = 0.22 \text{ m}$ $f = v/\lambda = 330 \text{ ms}^{-1} / 0.22 \text{ m} = 1500 \text{ Hz}$ $u = fd/K = [1500 \text{ Hz} \times (0.15 \times 10^{-3} \text{ m})] / 0.2 = 1.125 \text{ ms}^{-1}$	(5)
Total for question 16		9

Question Number	Answer	Mark
17a	(Pulse reflects at) a boundary between different materials/media/densities (1) (allow “between steel and air” for “between different materials”) (allow “speed of ultrasound in air is different to that of steel”)	(1)
17b	Method 1 (Calculating distance to crack) Reads time difference of 24.5 - 25 μs from graph (1) Use of speed = distance/time to calculate distance (1) Uses half time or half distance in calculation (1) Depth = 7.1 - 7.3 cm < 15cm, so reflection is from a crack Or Depth = 7.1 - 7.3 cm < 15cm, so cannot be from bottom of rail (1) OR Method 2 (Calculating time to bottom of rail and back) Use of speed = distance/time to calculate time (1) Uses 30cm in calculation (1) Reads time difference of 24.5 - 25 μs from graph (1) Time = 52 μs > 24.5 - 25 μs , so reflection is from a crack Or Time = 52 μs > 24.5 - 25 μs , so cannot be from the bottom of rail (1) Example of calculation Time between transmitting and receiving = 24.75 μs So time taken to get to point of reflection = 12.375 μs Distance = speed \times time = 5800 m s ⁻¹ \times (12.375 \times 10 ⁻⁶) = 0.072 m.	(4)
17c	Most/all of the ultrasound is reflected by the first crack Or Pulse does not reach second crack Or None of the pulse is transmitted after the crack Or Ultrasound signal from deeper cracks is too weak to be detected (1)	(1)
17d	The idea that there is a time delay before reflected/received signals return (1) The idea that the train will no longer be in the same position if it is moving too fast. Or the idea that the train will be in the same/similar position of it is moving slowly (1)	(2)
Total for question 17		8

Question Number	Answer	Mark
18a	Vibrations/oscillations in one plane which includes the direction of wave travel Or Vibrations/oscillations in one direction perpendicular to the direction of wave travel	(1) (1) (1) (1) (2)
18b	The refracted ray lacks the planes of oscillation in the reflected light. Or the refracted ray has a plane of polarisation perpendicular to the plane of polarisation of the reflected light So, the refracted ray must also be partially plane polarised (MP2 conditional on awarding MP1)	(1) (1) (2)
18ci	See $n_a \sin \theta_a = n_g \sin \theta_g$ Or $n_a \sin \theta_B = n_g \sin r$ $n_a \sin(\theta_B) = n_g \sin(90 - \theta_B)$ Or $n_a \sin(\theta_B) = n_g \cos(\theta_B)$ Or $\sin r = \cos \theta_B$ $\sin(\theta_B)$ divided by $\cos(\theta_B)$ to give $\tan(\theta_B)$ leading to answer	(1) (1) (1) (1) (3)
18cii	Substitution of values into $\tan(\theta_B) = \frac{n_g}{n_a}$ $\theta_B = 56^\circ$ Example of calculation $\tan(\theta_B) = \frac{n_g}{n_a}$ $\theta_B = \tan^{-1}(1.50 / 1.00) = 56^\circ$	(1) (1) (2)
18ciii	Refractive index (of glass) is greater for violet Or $\frac{n_g}{n_a}$ is greater for violet Or $\tan \theta_B / \sin \theta_B / \theta_B$ is greater for violet Clearly links one of the above to the student being incorrect.	(1) (1) (2)
Total for question 18		11

Question Number	Answer	Mark
19ai	Minimum labelled at either rarefaction	(1)
19aia	Zero displacement at all compressions and/or all rarefactions.	(1)
19aib	Two complete wave cycles shown.	(1)
	 <p>(Allow graph inverted in relation to the one shown above)</p>	(2)
19bi	Describes an initial situation where the two traces are in antiphase / phase	(1)
	Record the position of the microphone (from the metre rule)	
	Or Measure the distance from the loudspeaker to the microphone	(1)
	Move microphone (gradually) until the two traces are next in antiphase / phase	(1)
	Record the new position of the microphone and calculate the distance moved by the microphone	
	Or Measure the new distance from the loudspeaker to the microphone and calculate the distance moved by the microphone	(1)
	Multiply calculated/measured wavelength by frequency to determine the speed	
	Or Describes a suitable graph to determine the speed	(1)
	(MP5 - examples of suitable graphs are λ against $1/f$ or f against $1/\lambda$. Both would give a gradient of v which needs to be stated to achieve the mark)	
19bii	Time period read off oscilloscope (from one point to the next in phase point)	(1)
	Or number of waves per second read off oscilloscope	(1)
	Time period (for both traces) is the same	(1)
19biii	Use of $v = f\lambda$	(1)
	Calculates λ of 8.5 cm (for 4.0 kHz) and 2.3 cm (for 15.0 kHz)	(1)
	Percentage uncertainty greater for 2.3cm than 8.5cm (so student correct)	
	Or Percentage uncertainty greater for 15.0kHz than 4.0kHz (so student correct)	
	Or Percentage uncertainty is reduced if measurements taken across several wavelengths (so student not necessarily correct)	(1)
	(Do not allow “uncertainty” for “percentage uncertainty”)	
	Example of calculation $\lambda = v/f = (340 \text{ ms}^{-1}) / (4000 \text{ Hz}) = 0.085 \text{ m}$ $\lambda = v/f = (340 \text{ ms}^{-1}) / (15000 \text{ Hz}) = 0.023 \text{ m}$	
	Total for question 19	13

